

FOUR POST BOAT STORAGE LIFT


This new series boat storage lifts are engineered to revolutionize the way you store your recreational boats. They come with three versatile designs: Standard, Extended Length & Capacity, and Extended Height that delivering the perfect fit for any boat. With two adjustable width settings, these lifts feature a large drive-in clearance over 110" to accommodate various trailers, delivering superior storage experience exceeds expectations.




**408-HPX
409-HPX
408HLX**




Proprietary lock control system.
(patent no.: 2023232158140)

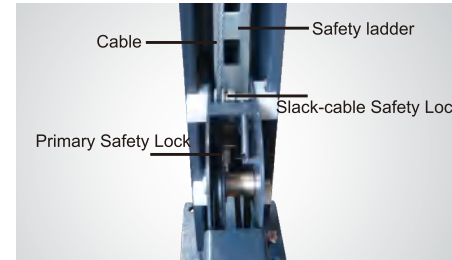

Double safety locks provide additional safety.

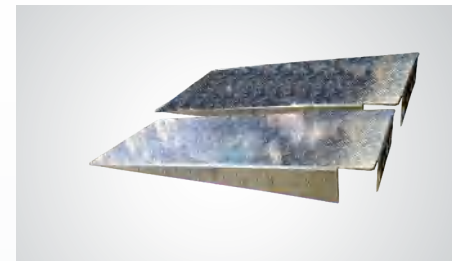


Optional extended aluminum alloy drive-in ramps.
Kits No.: 40814

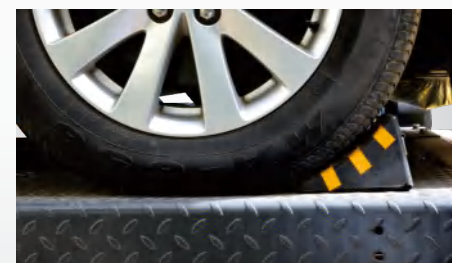

Optional rubber wheel chock.
P/N: 40811.



Adjustable trailer platform included as standard.
Adj.range:42 3/8"~66 3/16".

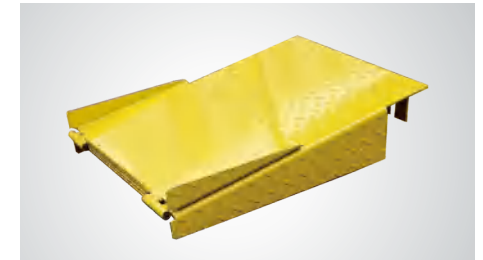

Foldable drive-on ramps.
(each lift 2 units).



Optional Motor protect cover for outdoor installation Kits No.:40810.
with emergency stop switch.



Optional Trailer Extended Platform adds an extra 24" length.
Kits No.:40818

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel:(214)377-8091



Standard



Extended Length



Extended Height


MODEL 408-HPX (8,000lbs)

MODEL 409-HPX (9,000lbs)

MODEL 408HLX (8,000lbs)


FEATURES

- Lifting capacity: 8,000lbs (408-HPX & 408HLX), 9,000lbs (409-HPX);
- Proprietary concealed lock-control device;
- Manual lock release, no extra air-source needed;
- Dual safety mechanisms with both primary safety locks and cable-slack protection;
- Integrated non-skid diamond platforms;
- Flexible installation, power side could be at any corner;
- Two-widths setting platforms accommodates various trailers;
- Foldable drive-in ramps come standard
- ETL certified Power unit .




EXCLUSIVE FEATURE

Double-S shape column

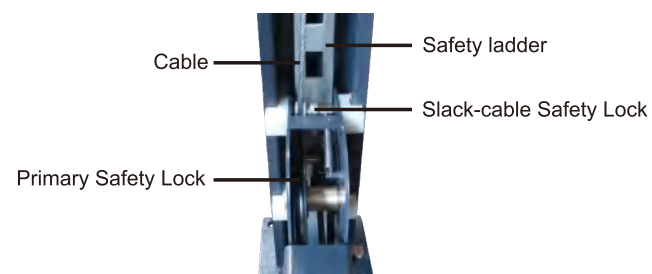

EXCLUSIVE FEATURE

Commercial double safety locks

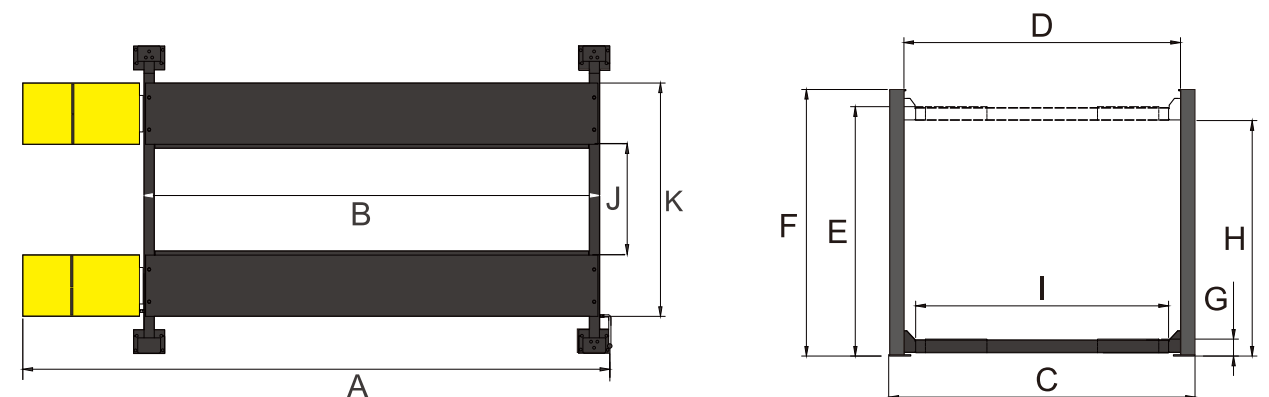

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A Overall Length (Inc.Ramps)	B Outside edge of crossbeams	C Overall Width	D Width Between Posts	E Max. Lifting Height	F Max. locking height	G Overall Height	H Minimum Height	I Max. Underneath Height	J Max. Lock Underneath runway	K Drive-Thru Clearance	L Width Between Runways	M Outside Edge of Runways	N Gross Weight	O Motor Power
408-HPX	8,000lbs	46S	222 1/8"	181 11/16"	131 5/8"	122"	87 1/2"	84 5/16"	96 5/8"	5 1/2"	82 9/16"	79 7/16"	110 13/16"	46 1/2" 66 3/8"	83 7/8" 103 3/4"	1,585lbs	2.0HP,220V
408HLX	8,000lbs	54S	222 1/8"	181 11/16"	131 5/8"	122"	104 1/2"	101 5/16"	112 3/8"	5 1/2"	99 9/16"	96 7/16"	110 13/16"	46 1/2" 66 3/8"	83 7/8" 103 3/4"	1,726lbs	2.0HP,220V
409-HPX	9,000lbs	57S	238 1/8"	197 3/4"	131 5/8"	122"	87 1/2"	84 3/4"	96 5/8"	5 15/16"	82 9/16"	79 7/16"	110 13/16"	42 3/8" 63 3/4"	82 3/8" 103 3/4"	1,980lbs	2.0HP,220V