



SPECIFICATIONS

Model		PRO-12	PRO-12A
Lifting Capacity		12,000lbs	12,000lbs
Lifting Time		63S	63S
Overall Length(Inc Ramps)	A	239 13/16"	239 13/16"
Overall Length(No Inc. Ramps)	B	197 3/4"	189 13/16"
Overall Width	C	126 5/16"	126 5/16"
Width Between Columns	D	112 1/4"	112 1/4"
Max. Lifting Height	E	74 7/16"	76 3/8"
Max. Lock Height to top of runway		71 1/4"	73 1/4"
Overall Height	F	86"	86"
Minimum Height	G	6 11/16"	8 11/16"
Max. Underneath Height	H	68 7/8"	68 7/8"
Max. Lock Underneath runway		65 3/4"	65 3/4"
Drive-Thru Clearance	I	98 3/8"	98 3/8"
Width Between Runways	J	43 5/16" Min.38"~ Max.50 7/8"	43 5/16" Min.38"~ Max.50 7/8"
Outside Edge of Runways	K	83 5/16" Min.78"~ Max.90 7/8"	83 5/16" Min.78"~ Max.90 7/8"
Min. Four Wheel Align	L	/	81 3/4"
Max. Four Wheel Align	M	/	166 5/16"
Max. Two Wheel Align	N	/	167 5/8"
Gross Weight		2,361lbs	2,936lbs
Motor		2.0HP,220V/60Hz,single phase	

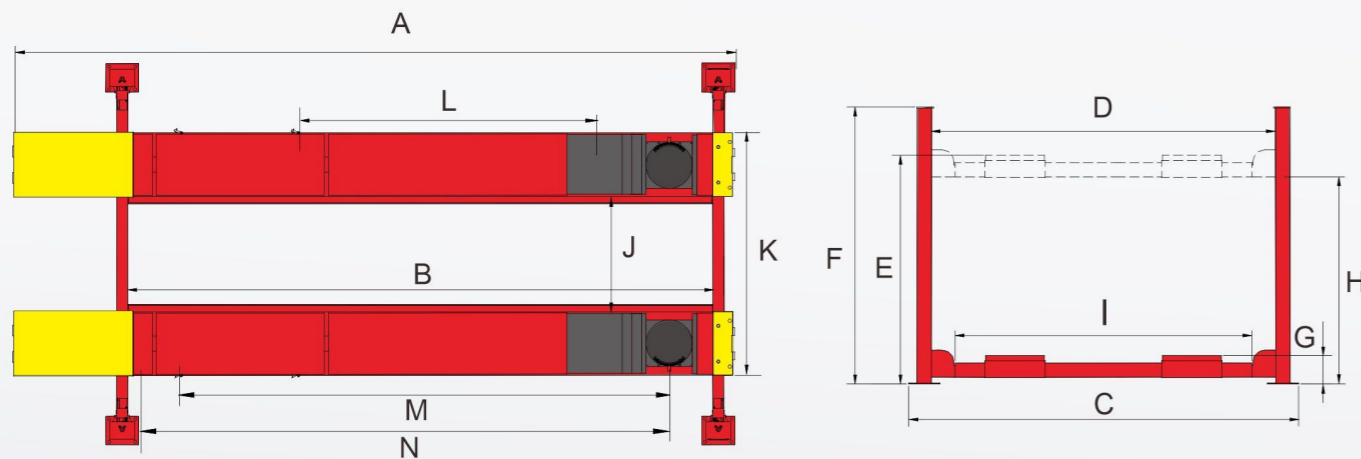

FOUR POST COMMERCIAL LIFT

The commercial-grade PRO12 series four-post lifts are the flawless choice for daily, quick servicing of cars, SUVs, pickups, and vans, with a capacity of up to 12,000 lbs. This series features stepless width adjustment technology to accommodate various wheel tracks, along with heavy-duty construction that delivers rugged durability and ensures maximum safety. It's the ideal service tool for both garages and professional service shops.

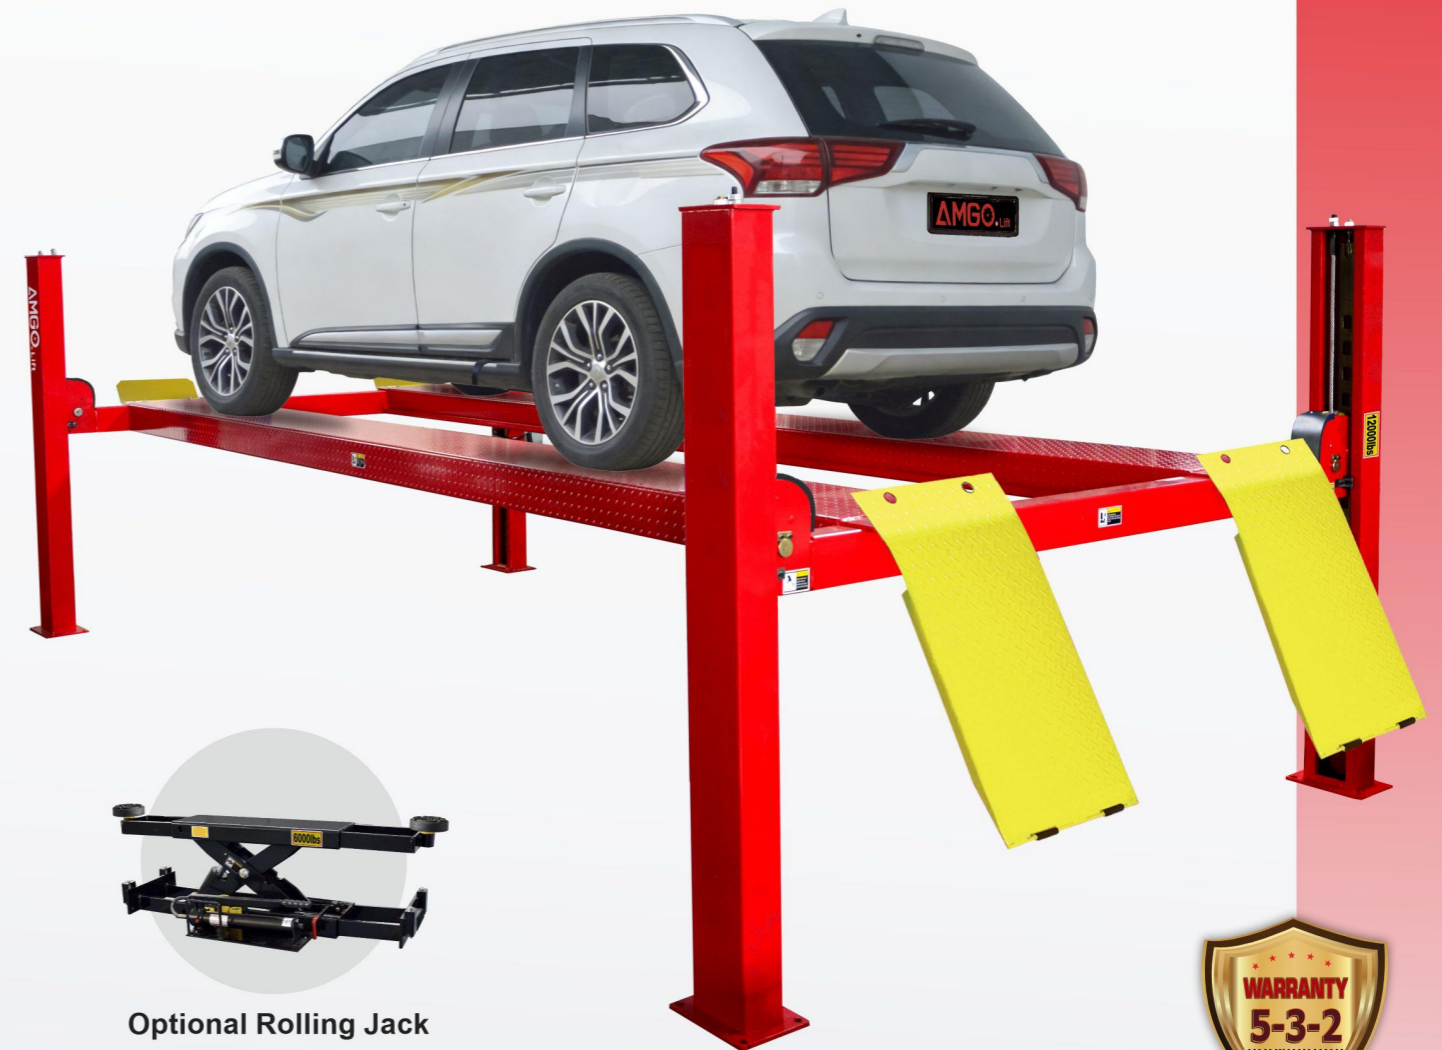

Optional Rolling Jack

RJ-6H: manual hydraulic type 6,000lbs
RJ-6A: pneumatic hydraulic type 6,000lbs



AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite #200, Dallas, TX 75211, USA
Tel:(214)377-8091

PRO-12

12,000lbs


General service

PRO-12A

12,000lbs


Alignment service

- ✓ AMGO ETL certified power unit comes as standard;
- ✓ Mechanical self-locking safety device with air-driven lock release;
- ✓ Primary multiple safety locks and cable-slack protection system come standard;
- ✓ Cable-driven, utilizing aircraft standard high quality cables;
- ✓ Hydraulic cylinder is designed and made to high standard, utilizing high quality oil seals and compensation valve;
- ✓ Non-skid diamond platforms;
- ✓ Stepless adjustable width between platforms;
- ✓ Integrated slip plates and adjustable turnplate pockets (only PRO-12A).

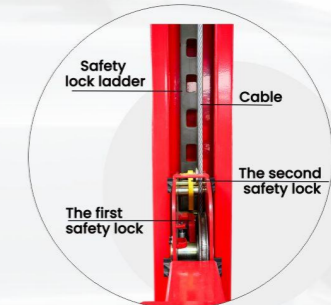


Double-safety locks

FEATURES

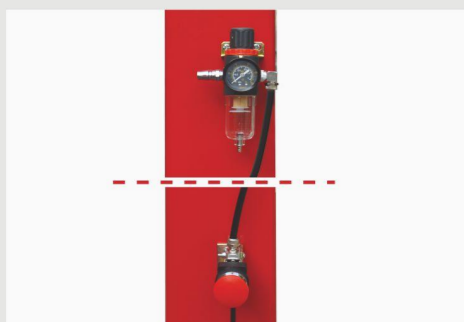

• Oil-water separator and solenoid air valve are installed on the power side column.

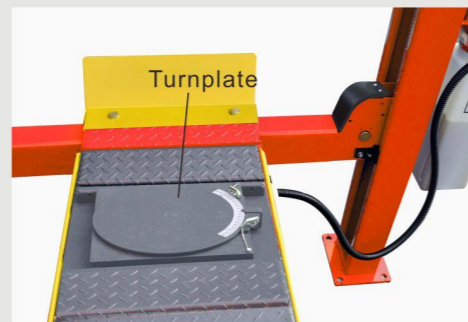

• Adjustable turnplates blocks for the PRO-12A. Optional turnplate. Kits No.: 40101



• Stepless adjustable width between platforms.



• Optional Air line kits. Kits No.:40102A



• Optional extension platform adds 26" in length to the platform. Kits No.:41203



• Optional adjustable blocks used with platform extension kit (41203), Kits No.40905