
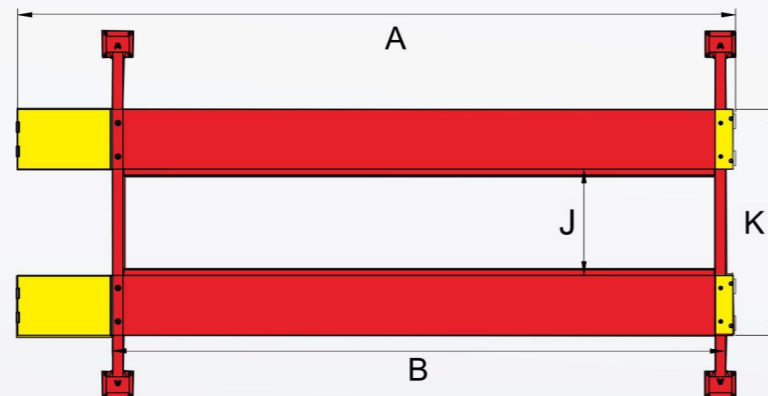


SPECIFICATIONS

Model		PRO-30	PRO-30E	PRO-40	PRO-40E
Lifting Capacity		30,000lbs	30,000lbs	40,000lbs	40,000lbs
Lifting Time		133S	133S	183S	183S
Overall Length(Inc Ramps)	A	307 1/16"	366 1/8"	366 1/8"	425 3/16"
Overall Length(No Inc. Ramps)	B	248"	307 1/16"	307 1/16"	366 1/8"
Overall Width	C	147 9/16"	147 9/16"	151 1/2"	151 1/2"
Width Between Columns	D	130"	130"	133 15/16"	133 15/16"
Max. Lifting Height	E	75 3/16"	75 3/16"	75 3/8"	75 3/8"
Max. Lock Height to top of runway	E	71 5/8"	72 1/16"	72 3/16"	72 3/16"
Overall Height	F	92"	92"	92"	92"
Minimum Height	G	10 1/4"	10 1/4"	10 3/8"	10 3/8"
Max. Underneath Height	H	66 5/16"	66 5/16"	66 5/16"	66 5/16"
Max. Lock Underneath runway	H	63 3/16"	63 3/16"	63 3/16"	63 3/16"
Drive-Thru Clearance	I	115 15/16"	115 15/16"	119 13/16"	119 13/16"
Width Between Runways	J	46" 54 1/16"	46" 54 1/16"	46" 54 1/16"	46" 54 1/16"
Outside Edge of Runways	K	94" 102 1/8"	94" 102 1/8"	101 7/8" 110"	101 7/8" 110"
Gross Weight		5,618lbs	6,860 lbs	8,503 lbs	9,576 lbs
Motor		2.0HP, 220V / 60Hz, single phase			

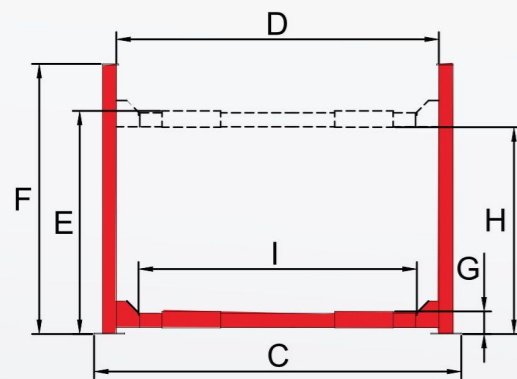

FOUR POST
SUPER DUTY LIFT

The AMGO Super Duty Series boasts two high-capacity options- 30,000lbs and 40,000lbs-solidifying its place as the premier choice for the heaviest vehicles on the road. Engineered for convenience, comfort, and safety, it is the ultimate partner in large vehicle maintenance. They feature two width setting to seamlessly adapt to various large commercial vehicles.



Optional Rolling Jack
RJ-20A: pneumatic hydraulic type 20,000lbs



AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite #200, Dallas, TX 75211, USA
Tel:(214)377-8091

PRO-30
PRO-30E
30,000lbs

PRO-40
PRO-40E
40,000lbs

- ✓ AMGO ETL certified power unit comes as standard;
- ✓ Mechanical self-locking safety device with air-driven lock release;
- ✓ Primary multiple safety locks and cable-slack protection system come standard;
- ✓ Cable-driven, utilizing aircraft standard high quality cables;
- ✓ Hydraulic cylinder is designed and made to high standard, utilizing high quality oil seals and compensation valve;
- ✓ Non-skid diamond platforms;
- ✓ Two width settings fit various large commercial vehicles;



Double-safety locks

FEATURES



- Oil-water separator and solenoid air valve are installed on the power side column.



- ETL certified AMGO powerunit .



- Non-slip diamond platforms allow two-width setting.



- Optional Air line kits All AMGO four post lifts are designed to use the air line kits for rolling jack. Kits No.:40106A



- Optional Rolling Jacks RJ-20A: pneumatic hydraulic type, 20,000lbs capacity.