

MOTORCYCLE & ATV

The MC-1200P has same steel structure as the MC-1200, but adopt pneumatic hydraulic pump as the power supply in stead of electricity.



MC-1200P

Main Features

- Pneumatic hydraulic pump control.
- ✓ Manual release safety lock with auto activation.
- ✓ Skid proof diamond platform.
- ✓ Removable rear cover, convenient for rear wheel changing.
- ✓ Quick install and dismount approach ramps.
- ✓ Adjustable wheel vise installing to extend axle base up to 410mm(16 1/8").
- \checkmark Wheel vise design imitate the tire cure shape with screw adjustment.
- ✓ Standard tool tray.






Optional Lifting Jack Lifting capacity: 1,100 lbs (500kg). Perfect for wheel removal. Kits No.: MC005

Optional Length Extension Kit Adds an extra 15 3/4" (400mm) length on the platform for the long axle vehicle. Kits No.: MC002

SPECIFICATIONS

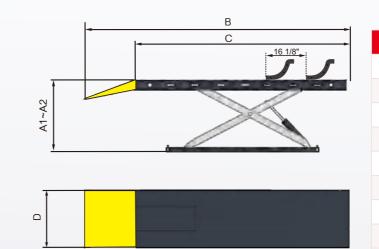

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA

MOTORCYCLE LIFT



Front Wheel Vise Front wheel vise with an adjustable positioning distance of 16 1/8" (410mm).



Rear Tire Removal Cover Removable platform cover plate is convenient for rear wheel changing.



Optional Width Extension Kit Adds an extra width of 23 5/8" (600mm) on the platform to be suitable for three or four-wheel motorcycles. Kits No.: MC001



Optional Vehicle Securing Belt Tightens the vehicle before lifting. Kits No.: MC006

Model		MC-1200P
Lifting Capacity		1,200 lbs (600kg)
Lifting Time		23S
Lifting Height	A1	43" (1090mm)
Minimum Height	A2	6 1/8" (155mm)
Overall Length(Inc.Ramp)	В	106 1/4" (2700mm)
Runway Length	С	88 5/8" (2250mm)
Overall Width	D	29 1/2" (750mm)
Gross Weight		503 lbs (228kg)
Air pressure range		0.6 Mpa

