


SPECIFICATIONS

Model		PRO-12	PRO-12A
Lifting Capacity		12,000lbs	12,000lbs
Lifting Time		63S	63S
Overall Length(Inc Ramps)	A	236 11/16"	236 11/16"
Overall Length(No Inc. Ramps)	B	200 3/4"	200 3/4"
Overall Width	C	126 5/16"	126 5/16"
Width Between Columns	D	112 1/4"	112 1/4"
Max. Lifting Height	E	74"	76"
Max. Lock Height to top of runway		70 7/8"	72 7/8"
Overall Height	F	86"	86"
Minimum Height	G	6 11/16"	8 5/8"
Max. Underneath Height	H	68 1/2"	68 1/8"
Max. Lock Underneath runway		65 3/8"	65 3/8"
Drive-Thru Clearance	I	98 3/8"	98 3/8"
Width Between Runways	J	43 5/16" Min.39 3/8"~ Max.51 3/16"	43 5/16" Min.39 3/8"~ Max.51 3/16"
Outside Edge of Runways	K	83 5/16" Min.43 3/8"~ Max.91 3/16"	83 5/16" Min.43 3/8"~ Max.91 3/16"
Min. Four Wheel Align	L	/	78 3/4"
Max. Four Wheel Align	M	/	157 1/2"
Max. Two Wheel Align	N	/	163 3/8"
Gross Weight		2,337lbs	2,919lbs
Motor		2.0HP,220V/60Hz,single phase	

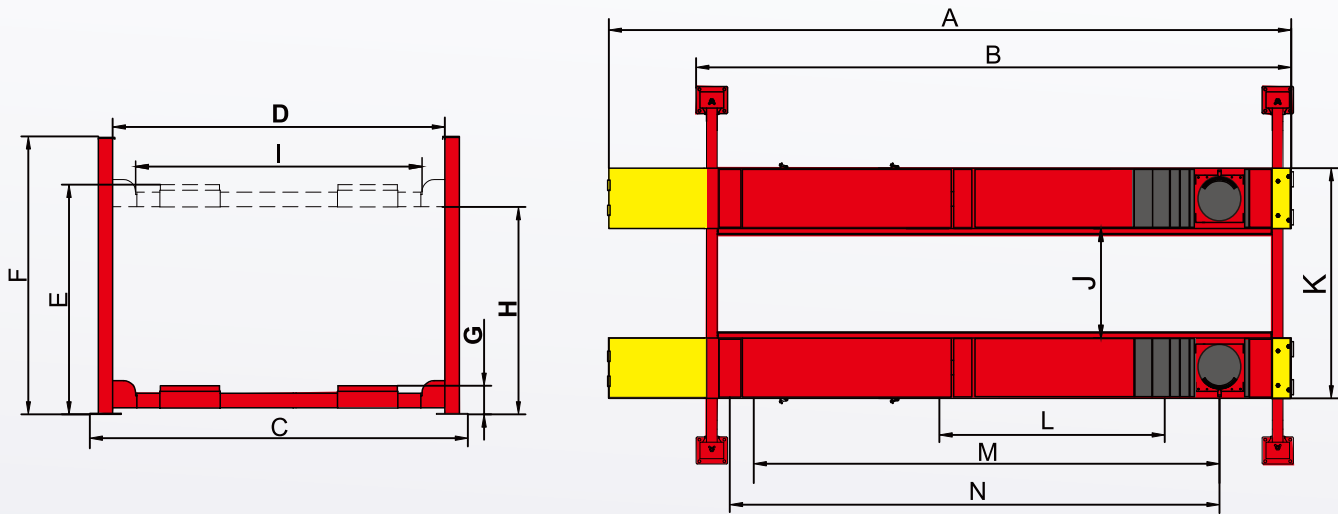

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel: (214) 377-7742



www.amgohyd.com



PRO-12

PRO-12A

FOUR POST
COMMERCIAL LIFT

The perfect choice with the combination of performance and reliability for your commercial service.




Optional Rolling Jack

RJ-6H: manual hydraulic type 6,000lbs
RJ-6A: pneumatic hydraulic type 6,000lbs

PRO-12
General service


PRO-12A
Alignment service

- ✓ 12,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ Adjustable lifting platform: Off-side platform can be adjusts the mounting position left or right as required. The standard distance between two platforms is 43 1/4" and maximum distance is 51 1/8";
- ✓ Optional Rolling Jacks:
 - RJ-6H 6,000lbs manual pump;
 - RJ-6A 6,000lbs pneumatic pump;
- ✓ More choices:
 - Optional led lights Kits No.: 40103;
 - Optional extension Kits No.: 41203;
 - Optional air line Kits No.: 40102.

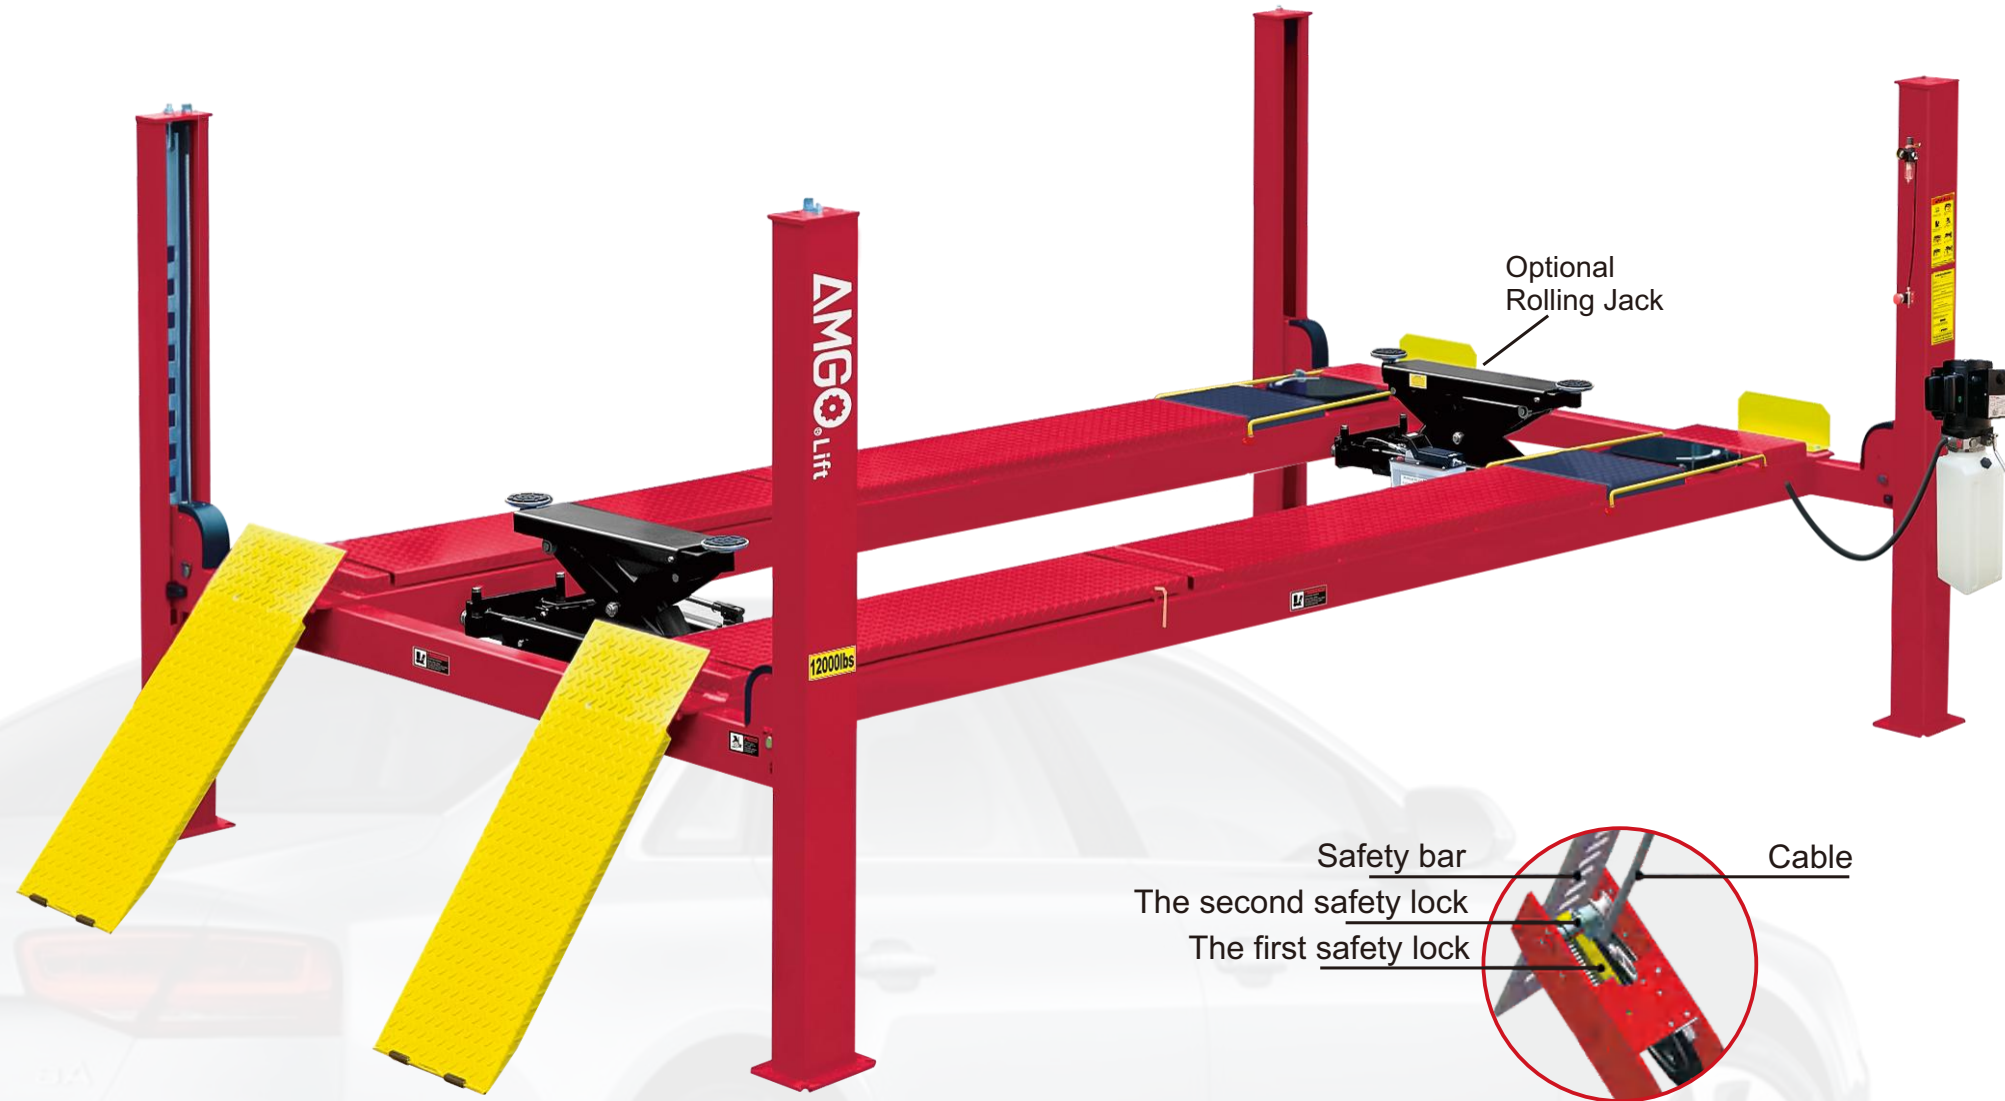


Double-safety locks

FEATURES

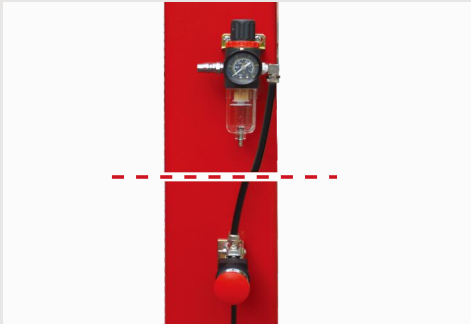

- Air controlled safety device.

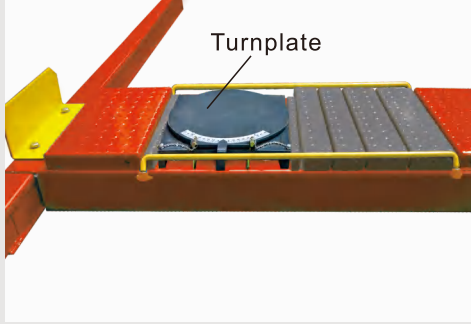

- Adjustable turnplates blocks for the PRO-12A. Optional turnplate. Kits No.: 40101



- Stepless adjustable width between platforms.



- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102



- Optional length extension kits adds an extra 26" length to the platform. Kits No.: 41203.



- Optional adjustable blocks for alignment 4 post lift. Kits No.: 40905 (used with kits 41203)