


SPECIFICATIONS

Model		PRO-14	PRO-14A	PRO-14E	PRO-14AE
Lifting Capacity		14,000lbs	14,000lbs	14,000lbs	14,000lbs
Lifting Time		79S	79S	81S	81S
Overall Length(Inc Ramps)	A	257 1/2"	257"	286 "	285 1/2"
Overall Length(No Inc. Ramps)	B	216 1/2"	216 9/16"	245 1/16"	245 1/16"
Overall Width	C	130 7/8"	130 7/8"	130 7/8"	130 7/8"
Width Between Columns	D	116"	116"	116"	116"
Max. Lifting Height	E	75 1/8"	77 3/16"	74 13/16"	77 3/16"
Max. Lock Height to top of runway		72"	74"	72"	74"
Overall Height	F	86 3/16"	86 3/16"	86 3/16"	86 3/16"
Minimum Height	G	7 7/8"	9 7/8"	7 7/8"	9 7/8"
Max. Underneath Height	H	68 1/2"	68 1/2"	68 1/2"	68 1/2"
Max. Lock Underneath runway		65 3/8"	65 3/8"	65 3/8"	65 3/8"
Drive-Thru Clearance	I	102 1/16"	102 1/16"	102 1/16"	102 1/16"
Width Between Runways	J	47" Min.3 3/8"~Max.54 1/2"	47" Min.3 3/8"~Max.54 1/2"	47" Min.3 3/8"~Max.54 1/2"	47" Min.3 3/8"~Max.54 1/2"
Outside Edge of Runways	K	87" Min.43 3/8"~Max.94 1/2"	87" Min.43 3/8"~Max.94 1/2"	87" Min.43 3/8"~Max.94 1/2"	87" Min.43 3/8"~Max.94 1/2"
Min. Four Wheel Align	L	/	94 5/16"	/	94 5/16"
Max. Four Wheel Align	M	/	169 11/16"	/	169 11/16"
Max. Two Wheel Align	N	/	176"	/	204 5/16"
Gross Weight		2,784lbs	3,377lbs	3,095lbs	3,576lbs
Motor		2.0HP,220V/60Hz,single phase			

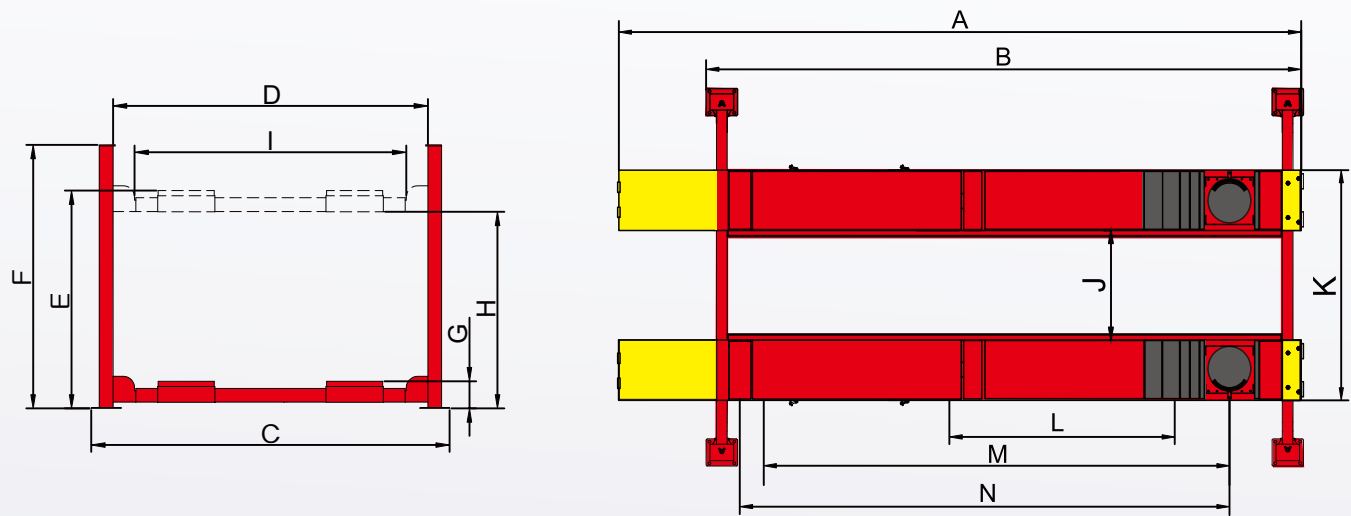

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211,USA
Tel:(214)377-7742



We're More Than a Manufacturer. We Are the
Leader in Innovation, Technology and Service

www.amgohyd.com



FOUR POST
COMMERCIAL LIFT

AMGO heavy-duty four post lifts are best choice for heavy duty vehicles or trucks in commercial shops... stronger and faster! .



Optional Rolling Jack
RJ-8A: pneumatic hydraulic type 8,000lbs

PRO-14
PRO-14E
PRO-14A
PRO-14AE


**PRO-14
PRO-14E
General service**

**PRO-14A
PRO-14AE
Alignment service**


- ✓ 14,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ Adjustable lifting platform: Off-side platform can adjust the mounting position left or right as required. The standard distance between two platforms is 47" and maximum distance is 54 1/2"
- ✓ Optional Rolling Jacks:
 - RJ-8A: pneumatic hydraulic type 8,000lbs;
- ✓ More choices:
 - Optional led lights Kits No.: 40103
 - Optional extension Kits No.: 41403;
 - Optional air line Kits No.: 40102.



FEATURES

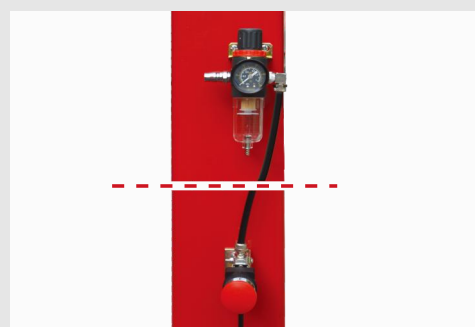

- Air controlled safety device.

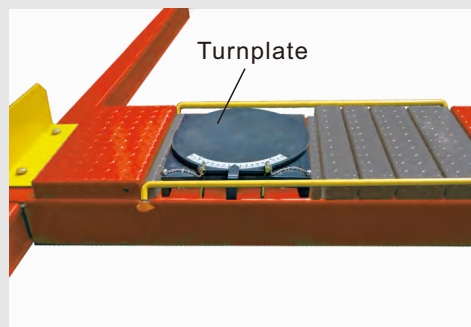


- Adjustable turnplates blocks for the PRO-14A, PRO-14AE.
Optional turnplate. Kits No.: 40101



- Stepless adjustable width between platforms.



- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102A

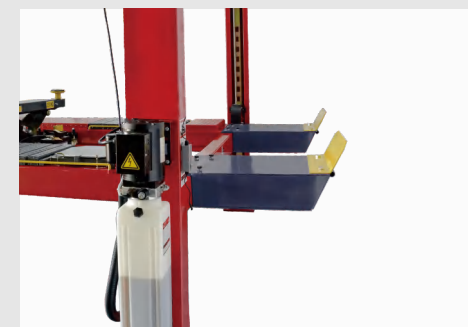

- Optional length extension kits adds an extra 26" length to the platform.
Kits No.: 41203.



- Optional adjustable blocks for PRO-14A/PRO-14AE.
Kits No.: 40905 (used with kits 41403)