

FOUR POST

TRUCK LIFT

AMGO's truck lift models are built with latest manufacturing technology and featured extra wide runways to accommodate a wide viriety of vehicle types, from SUVs, Vans, mid-size trucks up to heavy-duty appilcation with a 18,000lbs lifting capacity. Increased safety, durability and productivity have set up these models more superior in the competitive lift market.




PRO-18

PRO-18A



SPECIFICATIONS

| Model                             |   | PRO-18                               | PRO-18A                              |
|-----------------------------------|---|--------------------------------------|--------------------------------------|
| Lifting Capacity                  |   | 18,000lbs                            | 18,000lbs                            |
| Lifting Time                      |   | 81S                                  | 81S                                  |
| Overall Length(Inc Ramps)         | A | 293 1/4"                             | 292 3/4"                             |
| Overall Length(No Inc. Ramps)     | B | 252 1/4"                             | 252 1/4"                             |
| Overall Width                     | C | 137 1/16"                            | 137 1/16"                            |
| Width Between Posts               | D | 122 3/8"                             | 122 3/8"                             |
| Max. Lifting Height               | E | 75 3/16"                             | 77 3/16"                             |
| Max. Lock Height to top of runway |   | 72"                                  | 74"                                  |
| Overall Height                    | F | 86 3/16"                             | 86 3/16"                             |
| Minimum Height                    | G | 7 7/8"                               | 9 7/8"                               |
| Max. Underneath runway            | H | 68 1/2"                              | 68 1/2"                              |
| Max. Lock Underneath runway       |   | 65 3/8"                              | 65 3/8"                              |
| Drive-Thru Clearance              | I | 108 1/4"                             | 108 1/4"                             |
| Width Between Runways             | J | 51 1/4"<br>Min.3 3/8"~ Max.57 13/16" | 51 1/4"<br>Min.3 3/8"~ Max.57 13/16" |
| Outside Edge of Runways           | K | 95 1/4"<br>Min.43 3/8"~ Max.101 3/4" | 95 1/4"<br>Min.43 3/8"~ Max.101 3/4" |
| Min. Four Wheel Align             | L | /                                    | 99 5/8"                              |
| Max. Four Wheel Align             | M | /                                    | 182 11/16"                           |
| Max. Two Wheel Align              | N | /                                    | 209 1/16"                            |
| Gross Weight                      |   | 3,483lbs                             | 4,429lbs                             |
| Motor                             |   | 2.0HP,220V/60Hz,single phase         |                                      |

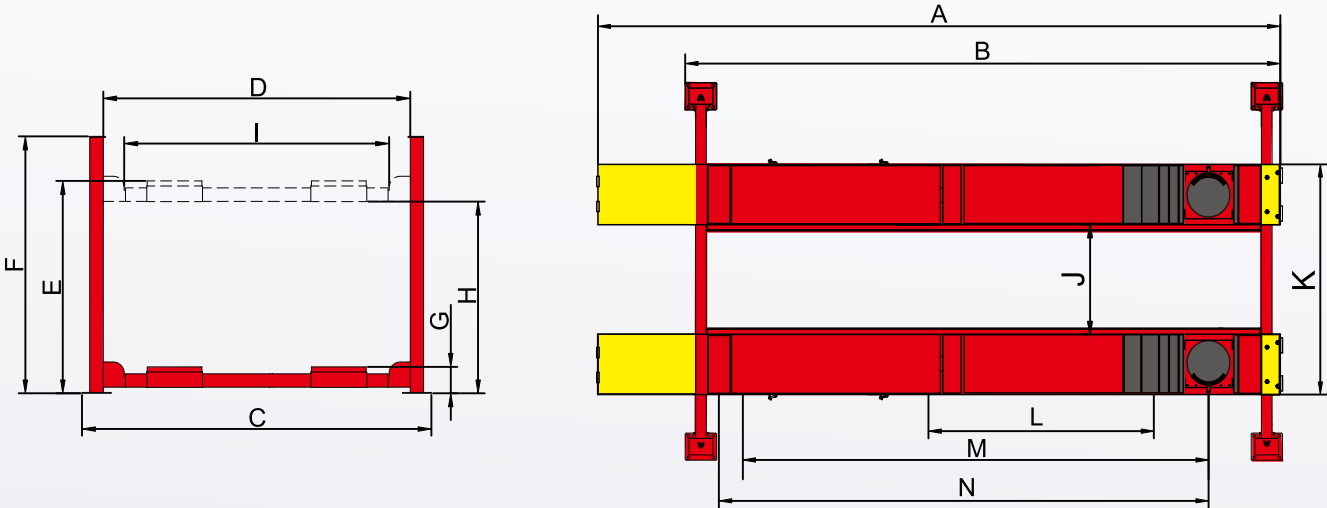

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA  
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA  
Tel: (214) 377-7742


**PRO-18**  
General service

**PRO-18A**  
Alignment service


- ✓ 18,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Ø1/2" aircraft quality cable;
- ✓ Adjustable turnplate blocks to fit various wheel bases on the PRO-18A;
- ✓ Integrated rear slip plates for the PRO-18A;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ The width of platform is 22" and width between two platforms are 51 1/4".
- ✓ Optional Rolling Jacks:
- RJ-10A 10,000lbs capacity with pneumatic pump.



**FEATURES**

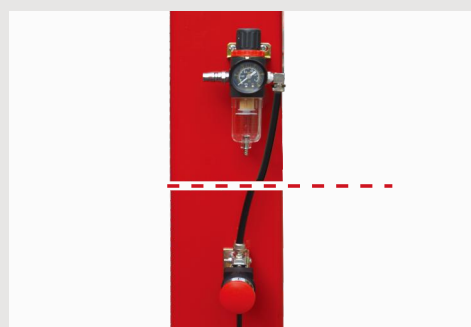


- Air controlled safety device.

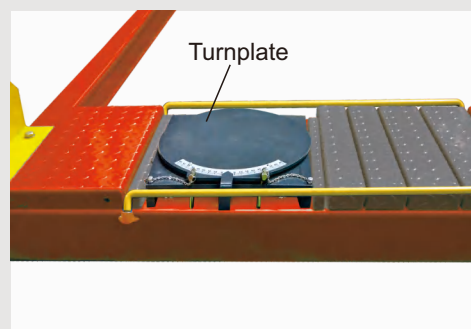

- Adjustable turnplates blocks for the PRO-18A. Optional turnplate. Kits No.: 40101



- **Optional** airline kits. Easy and convenient to install with all models of rolling jack with pneumatic pump. Kits No. 40102

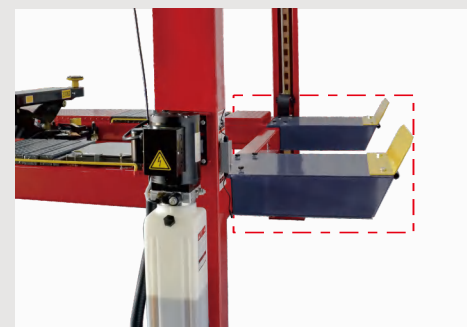

- **Optional** length extension kits adds an extra 29" length to the platform. Kits No.: 41801



- **Optional** adjustable blocks for PRO-18A. Kits No.: 41803 (used with kits 40801)



- **Optional** Rolling Jacks 10,000lbs: RJ-10A with pneumatic hydraulic pump.