


SPECIFICATIONS

Model		PRO-18	PRO-18A
Lifting Capacity		18,000lbs	18,000lbs
Lifting Time		81S	81S
Overall Length(Inc Ramps)	A	293 1/4"	292 3/4"
Overall Length(No Inc. Ramps)	B	252 1/4"	252 1/4"
Overall Width	C	137 1/16"	137 1/16"
Width Between Posts	D	122 3/8"	122 3/8"
Max. Lifting Height	E	75 3/16"	77 3/16"
Max. Lock Height to top of runway		72"	74"
Overall Height	F	86 3/16"	86 3/16"
Minimum Height	G	7 7/8"	9 7/8"
Max. Underneath runway	H	68 1/2"	68 1/2"
Max. Lock Underneath runway		65 3/8"	65 3/8"
Drive-Thru Clearance	I	108 1/4"	108 1/4"
Width Between Runways	J	51 1/4" Min.3 3/8"~ Max.57 13/16"	51 1/4" Min.3 3/8"~ Max.57 13/16"
Outside Edge of Runways	K	95 1/4" Min.43 3/8"~ Max.101 3/4"	95 1/4" Min.43 3/8"~ Max.101 3/4"
Min. Four Wheel Align	L	/	99 5/8"
Max. Four Wheel Align	M	/	182 11/16"
Max. Two Wheel Align	N	/	209 1/16"
Gross Weight		3,483lbs	4,429lbs
Motor		2.0HP,220V/60Hz,single phase	

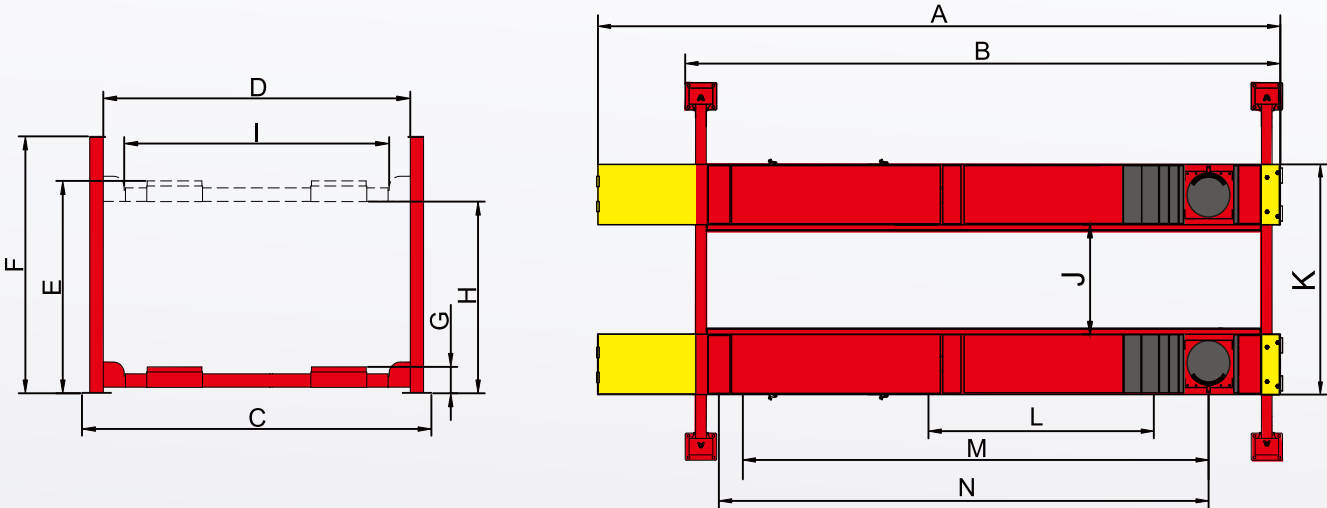

FOUR POST

TRUCK LIFT

AMGO's truck lift models are built with latest manufacturing technology and featured extra wide runways to accommodate a wide viriety of vehicle types, from SUVs, Vans, mid-size trucks up to heavy-duty appilcation with a 18,000lbs lifting capacity. Increased safety, durability and productivity have set up these models more superior in the competitive lift market.



PRO-18

PRO-18A

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel: (214) 377-7742

Optional Rolling Jack

RJ-10A: pneumatic hydraulic type 10,000lbs




PRO-18
General service

PRO-18A
Alignment service


- ✓ 18,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Ø1/2" aircraft quality cable;
- ✓ Adjustable turnplate blocks to fit various wheel bases on the PRO-18A;
- ✓ Integrated rear slip plates for the PRO-18A;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ The width of platform is 22" and width between two platforms are 51 1/4".
- ✓ Optional Rolling Jacks:
- RJ-10A 10,000lbs capacity with pneumatic pump.



FEATURES

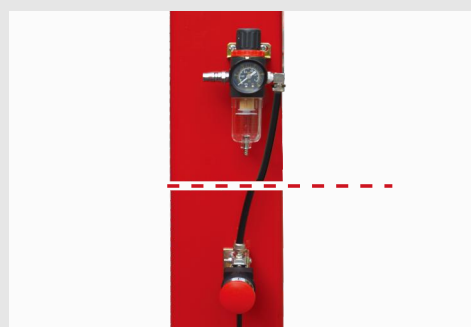


- Air controlled safety device.

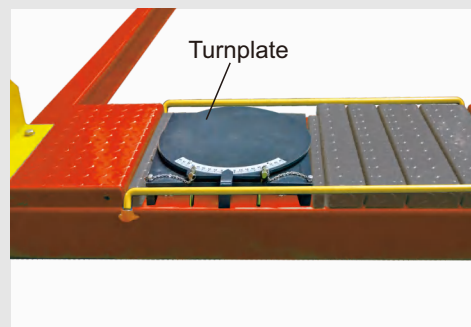

- Adjustable turnplates blocks for the PRO-18A. Optional turnplate. Kits No.: 40101



- **Optional** airline kits. Easy and convenient to install with all models of rolling jack with pneumatic pump. Kits No. 40102A

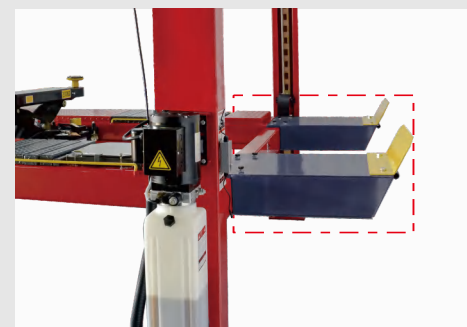

- **Optional** length extension kits adds an extra 29" length to the platform. Kits No.: 41801



- **Optional** adjustable blocks for PRO-18A. Kits No.: 41803 (used with kits 40801)



- **Optional** Rolling Jacks 10,000lbs: RJ-10A with pneumatic hydraulic pump.