


SPECIFICATIONS

Model		PRO-30	PRO-30E	PRO-40	PRO-40E
Lifting Capacity		30,000lbs	30,000lbs	40,000lbs	40,000lbs
Lifting Time		133S	133S	183S	183S
Overall Length(Inc Ramps)	A	307 1/8"	366 1/8"	366 1/8"	425 3/16"
Overall Length(No Inc. Ramps)	B	256 7/16"	315 1/2"	315 1/2"	374 9/16"
Overall Width	C	149 3/8"	149 3/8"	161 7/16"	161 7/16"
Width Between Columns	D	131 13/16"	131 13/16"	143 7/8"	143 7/8"
Max. Lifting Height	E	74 13/16"	74 13/16"	74 13/16"	74 13/16"
Max. Lock Height to top of runway		71 11/16"	71 11/16"	71 11/16"	71 11/16"
Overall Height	F	91 13/16"	91 13/16"	91 13/16"	91 13/16"
Minimum Height	G	10 7/16"	10 7/16"	10 7/16"	10 7/16"
Max. Underneath Height	H	65 7/8"	65 7/8"	65 7/8"	65 7/8"
Max. Lock Underneath runway		62 3/4"	62 3/4"	62 3/4"	62 3/4"
Drive-Thru Clearance	I	117 13/16"	117 13/16"	129 7/8"	129 7/8"
Width Between Runways	J	44 7/8"~54 3/4"	44 7/8"~54 3/4"	49 1/16"~58 7/8"	49 1/16"~58 7/8"
Outside Edge of Runways	K	92 15/16"~102 3/4"	92 15/16"~102 3/4"	104 15/16"~114 13/16"	104 15/16"~114 13/16"
Gross Weight		5,461lbs	6,676 lbs	8,283 lbs	9,306 lbs
Motor		2.0HP, 220V / 60Hz, single phase			

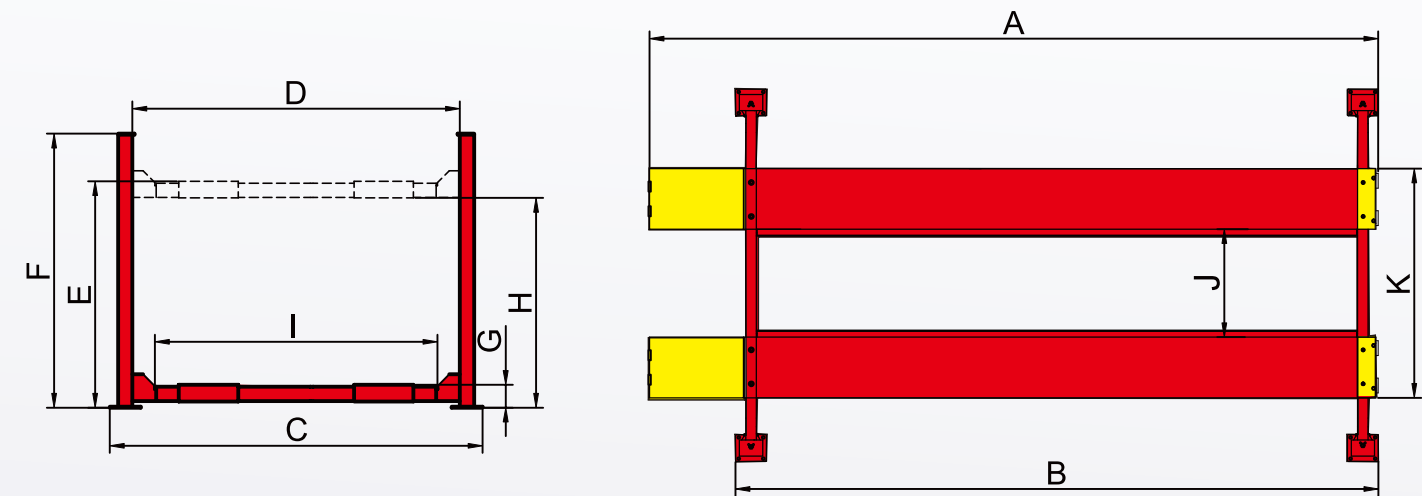

AMGO HYDRAULIC CORPORATION
SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211,USA
Tel:(214)377-7742

AMGO[®] Hydraulics
We're More Than a Manufacturer. We Are the
Leader in Innovation,Technology and Service
www.amgohyd.com

AMGO[®] Hydraulics
The Manufacturing Powerhouse

FOUR POST
SUPER DUTY GENERAL SERVICE
AMGO's Heavy Duty Truck Lifts are newly engineered lifts that makes light work out of heavy lifting.




Optional Rolling Jack
RJ-20A: pneumatic hydraulic type 20,000lbs



PRO-30
PRO-30E
PRO-40
PRO-40E


PRO-30 PRO-30E PRO-40 PRO-40E GENERAL SERVICE

- ✓ 30,000 lbs & 40,000 lbs lifting capacity;
- ✓ AMGO ETL certified power unit comes as standard.
- ✓ Mechanical self-locking safety device with air-driven lock release.
- ✓ Both primary multiple safety locks and cable-slack protection system are equipped as standard.
- ✓ Cable-driven, utilizing aircraft standard high quality cables.
- ✓ Hydraulic cylinder is designed and made to high standard, utilizing high quality oil seals and compensation valve.
- ✓ Non-skid diamond platforms.

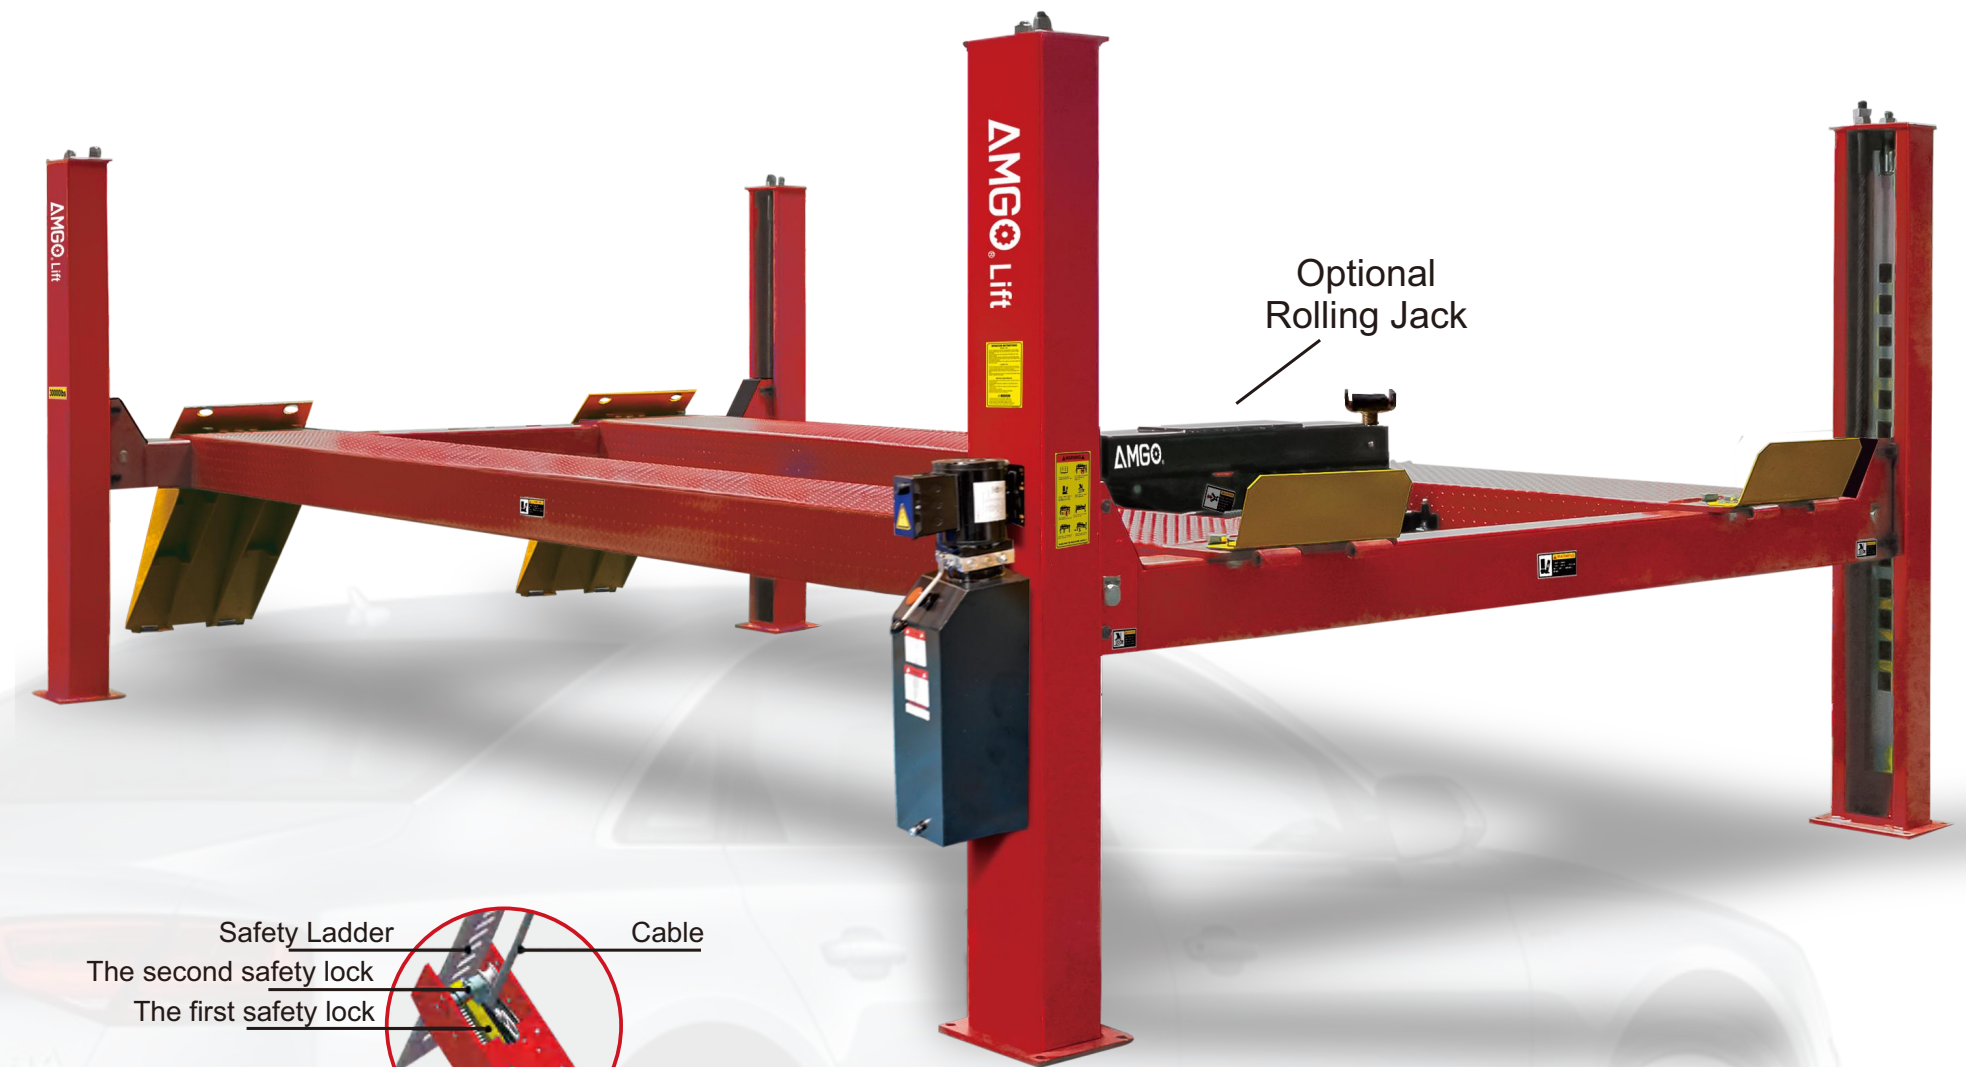

Double-safety locks

FEATURES

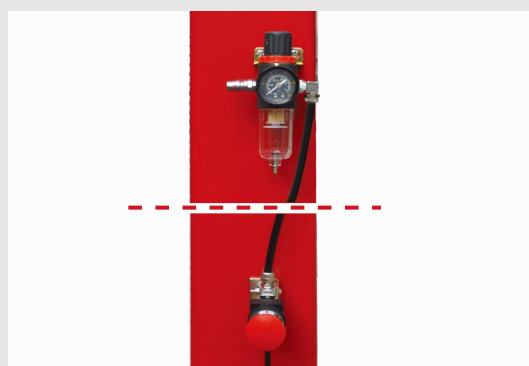

- Air controlled safety device.



- ETL certified AMGO powerunit .



- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories.
Kits No.: 40106A



- Optional length extension kits adds an extra 29" length on the platform.
Kits No.: 43001(PRO-30 only)



- Optional Rolling Jacks: RJ-20A 20,000lbs