

FOUR POST BOAT STORAGE LIFT


This new series boat storage lifts are engineered to revolutionize the way you store your recreational boats. They come with three versatile designs: Standard, Extended Length & Capacity, and Extended Height that delivering the perfect fit for any boat. With two adjustable width settings, these lifts feature a large drive-in clearance over 110" to accommodate various trailers, delivering superior storage experience exceeds expectations.




**408-HPX
409-HPX
408HLX**




Proprietary lock control system.
(patent no.: 2023232158140)

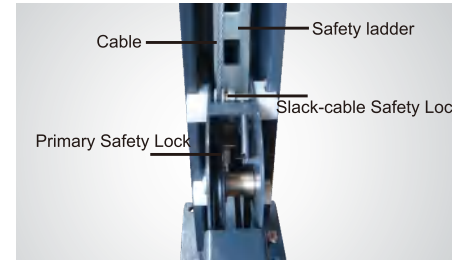

Double safety locks provide additional safety.

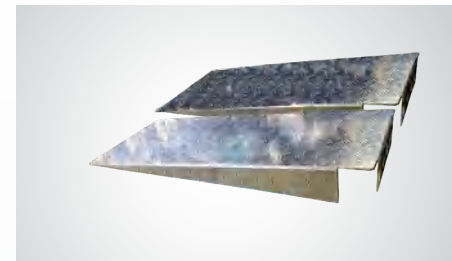


Optional extended aluminum alloy drive-in ramps.
Kits No.: 40814

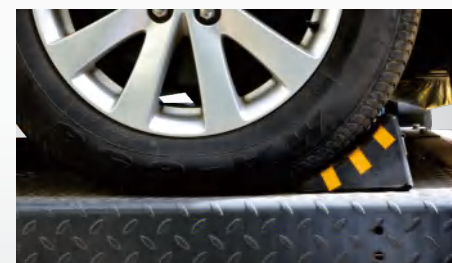

Optional rubber wheel chock.
P/N: 40811.



Adjustable trailer platform included as standard.
Adj.range:42 3/8"-66 3/16".

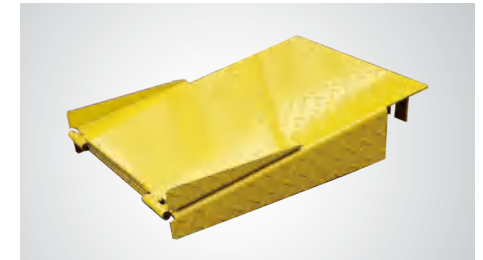

Foldable drive-on ramps.
(each lift 2 units).



Optional Motor protect cover for outdoor installation Kits No.:40810.
with emergency stop switch.



Optional Trailer Extended Platform adds an extra 24" length.
Kits No.:40818

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel:(214)377-8091



Standard



Extended Length



Extended Height


MODEL 408-HPX (8,000lbs)

MODEL 409-HPX (9,000lbs)

MODEL 408HLX (8,000lbs)


FEATURES

- Lifting capacity: 8,000lbs (408-HPX & 408HLX), 9,000lbs (409-HPX);
- Proprietary concealed lock-control device;
- Manual lock release, no extra air-source needed;
- Dual safety mechanisms with both primary safety locks and cable-slack protection;
- Integrated non-skid diamond platforms;
- Flexible installation, power side could be at any corner;
- Two-widths setting platforms accommodates various trailers;
- Foldable drive-in ramps come standard
- ETL certified Power unit .




EXCLUSIVE FEATURE

Double- shape column

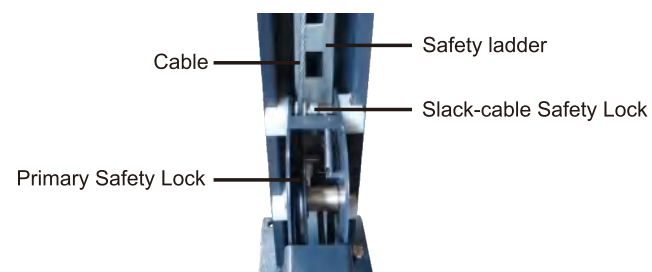

EXCLUSIVE FEATURE

Commercial double safety locks

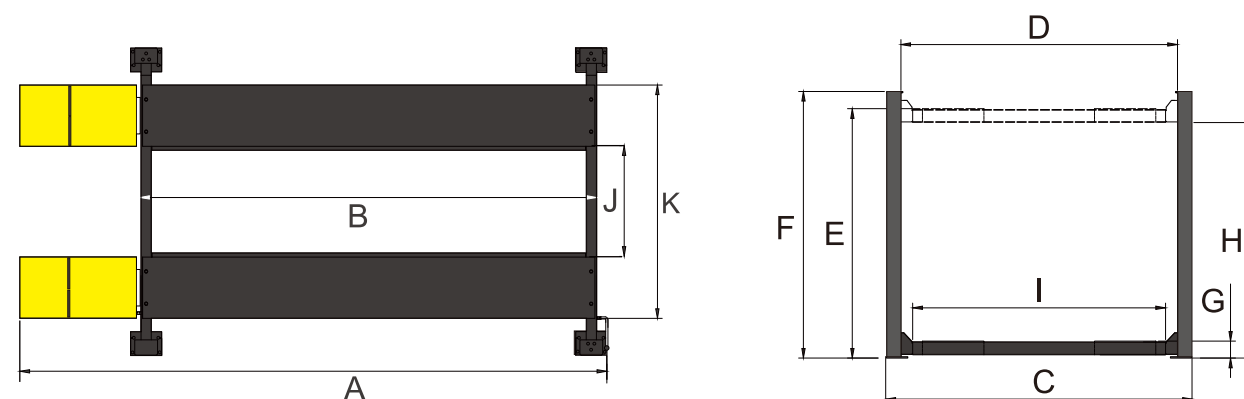

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A	B	C	D	E		F	G	H		I	J	K	Gross Weight	Motor Power
			Overall Length (Inc.Ramps)	Outside edge of crossbeams	Overall Width	Width Between Posts	Max. Lifting Height	Max. locking height	Overall Height	Minmum Height	Max. Underneath Height	Max. Lock Underneath runway	Drive-Thru Clearance	Width Between Runways	Outside Edge of Runways		
408-HPX	8,000lbs	46S	222 1/8"	181 11/16"	131 5/8"	122"	87 11/16"	84 1/2"	96 5/8"	5 11/16"	82 11/16"	79 13/16"	110 13/16"	46 1/2" 66 3/8"	83 7/8" 103 3/4"	1,585lbs	2.0HP,220V
408HLX	8,000lbs	54S	222 1/8"	181 11/16"	131 5/8"	122"	104 11/16"	101 5/16"	112 3/8"	5 11/16"	99 15/16"	96 13/16"	110 13/16"	46 1/2" 66 3/8"	83 7/8" 103 3/4"	1,726lbs	2.0HP,220V
409-HPX	9,000lbs	57S	238 1/8"	197 3/4"	131 5/8"	122"	88 1/16"	84 15/16"	96 5/8"	6 1/8"	82 9/16"	79 7/16"	110 13/16"	42 3/8" 63 3/4"	82 3/8" 103 3/4"	1,980lbs	2.0HP,220V