

# TWO POST LIFT

## **SPECIFICATIONS**

Model		OH-12	OH-12S
Lifting Capacity		12,000 lbs	12,000 lbs
Lifting Time		69s	69s
Max. Lifting height: (w/o extension adapter)	Α	72 1/2"~73 7/8"	72 1/2"~73 7/8"
Max. Lifting height: (w/ extension adapter)		81 9/16"~82 7/8"	81 9/16"~82 7/8"
Max. lock height: (w/o extension adapter)		70 9/16"~71 7/8"	70 9/16"~71 7/8"
Max. lock height: (w/ extension adapter)		79 9/16"~80 15/16"	79 9/16"~80 15/16"
Overall Height:(low setting)	В	174"	143 1/8"
Overall Height:(Medium setting)		186"	155 1/8"
Overall Height:(High setting)		198"	167 1/8"
Overall Width	С	150 3/4"	150 3/4"
Drive-Thru Clearance	D	109 3/4"	109 3/4"
Width Between Columns	Е	123 1/2"	123 1/2"
Minimum Pad Height	F	4 1/2"	4 1/2"
Gross Weight		2,346 lbs	2,202 lbs
Motor		2.0HP, 220V 60Hz, single phase	



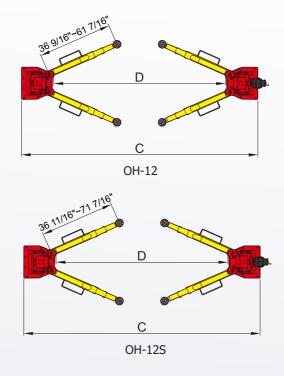

## AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211,USA Tel:(214)377-7742





# TWO-POST **HEAVY-DUTY LIFTS**

AMGO Heavy-duty two post lifts model OH-12S OH-12 are fitted to any vehicles and garage or commercial shop one lift, three heights, only available in AMGO!



OH-12

**OH-12S** 



## TWO-POST

# **HEAVY-DUTY LIFTS**

AMGO Two Post Lifts are manufactured on high quality standards by using critical material, advance features and innovated technology.

- √ Single-point safety release;
- √ Overhead safety stop device;
- √ Direct drive cylinder design, without chains and other drive parts;
- √ Dual hydraulic direct-drive cylinders, designed and made on high standards;
- $\sqrt{}$  Self-lubricating UHMW Polyethylene sliders and bronze bushings;
- √ Adjustable three height setting accommodate varying service ceiling height.
- √ Automatic arms restraints;
- √ Detachable foot guard and tool tray.

# MGO, Lift

# TWO POST LIFT



4 three-stages arms are suitable for more vehicles.



Both heavy duty single-screw rubber pads and saddle adapters come as standard



Both 3" and 6" extension adapters come as standard.




Toe guards and tool trays come as

## **FEATURES**



 Single point safety release makes it easier for operators to unlock both columns from one column.



Automatic arm restraints.



• The pulley with Self-lubricating bronze bush



• The optional base plate extension Kits No.21501.

# LESS MAINTENANCE, MORE RELIABLE

OH-12, OH-12S Two post lifts are the new produds developed by AMGO for heavy duty purpose with a lifting capacity up to 12,000lbs. Heavy-duty construction, self-lubricating bush, sliders and high quality parts to make the lifts with almost no maintenance required.

### 5-3-2 warranty:

5 years for steel construction, 3 years for hydraulic parts, and 2 years for electrical components.